


# #10 WoodTite™

**Diameter:** #10  
**Threads per In.:** 14  
**Length:** 1", 1½", 2", 2½", 3"  
**Point:** Type-17  
**Material:** Carbon Steel  
**Coating:** Oxysel

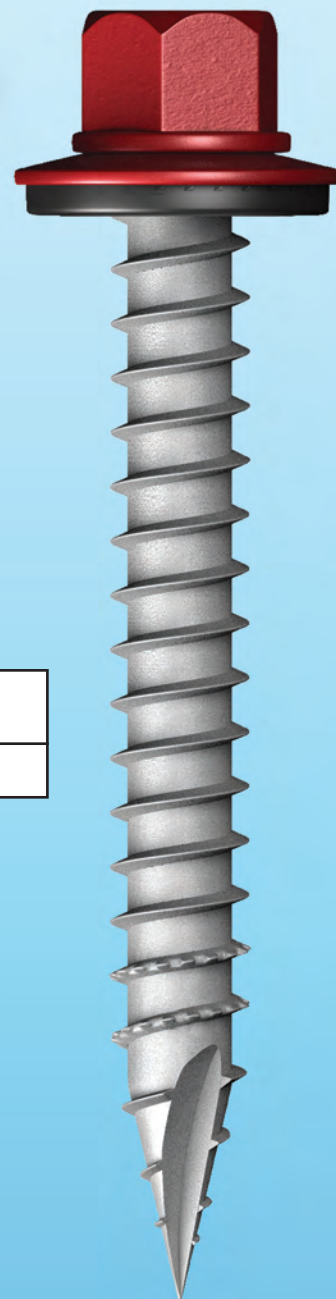


## ENGINEERING TEST REPORT

For questions contact Technical Service: 1-800-321-6977

Fastener Diameter	Minimum Torsional	Minimum Tensile	Minimum Shear
#10	68 in. lbs.	2,100 lbs.	1,265 lbs.

## PULL OUT VALUES



TEST MATERIAL	PENETRATION	RESULTS
S-P-F #2	1"	535 lbs.
S-P-F #2	1-1/2"	925 lbs.
5/8" OSB	Full	243 lbs.
5/8" CDX	Full	461 lbs.

**Note:** Pull-out values are a measurement of wood material strength. Actual field values may vary.

**Recommended Screw Gun Speed: 2,500 rpm maximum.**

**CAUTION:** Stripped threads may cause delayed failures resulting in costly leaks.

**NO IMPACT OR HAMMER DRILLS TO BE USED FOR INSTALLATION.**

**DISCLAIMER:** All test results and recommendations are based on laboratory tests. Specific job site conditions should be taken into consideration when specifying the proper fastener. Because applications may vary, we assume no liability for use of this information.

[www.atlasfasteners.com](http://www.atlasfasteners.com)

**ATLAS**  
Fasteners For Construction

[www.atlasfasteners.com](http://www.atlasfasteners.com)

1628 Troy Road • Ashland, Ohio 44805  
Phone: 419-289-6171 • Fax: 419-289-2564

**800-321-6977**

### SALES AND SERVICE CENTERS:

Ashland, OH  
1-800-321-6977

Flat Rock, NC  
1-800-364-0370

Houston, TX  
1-800-503-2105

Salem, OR  
1-800-547-8740