


#14 WoodTite™

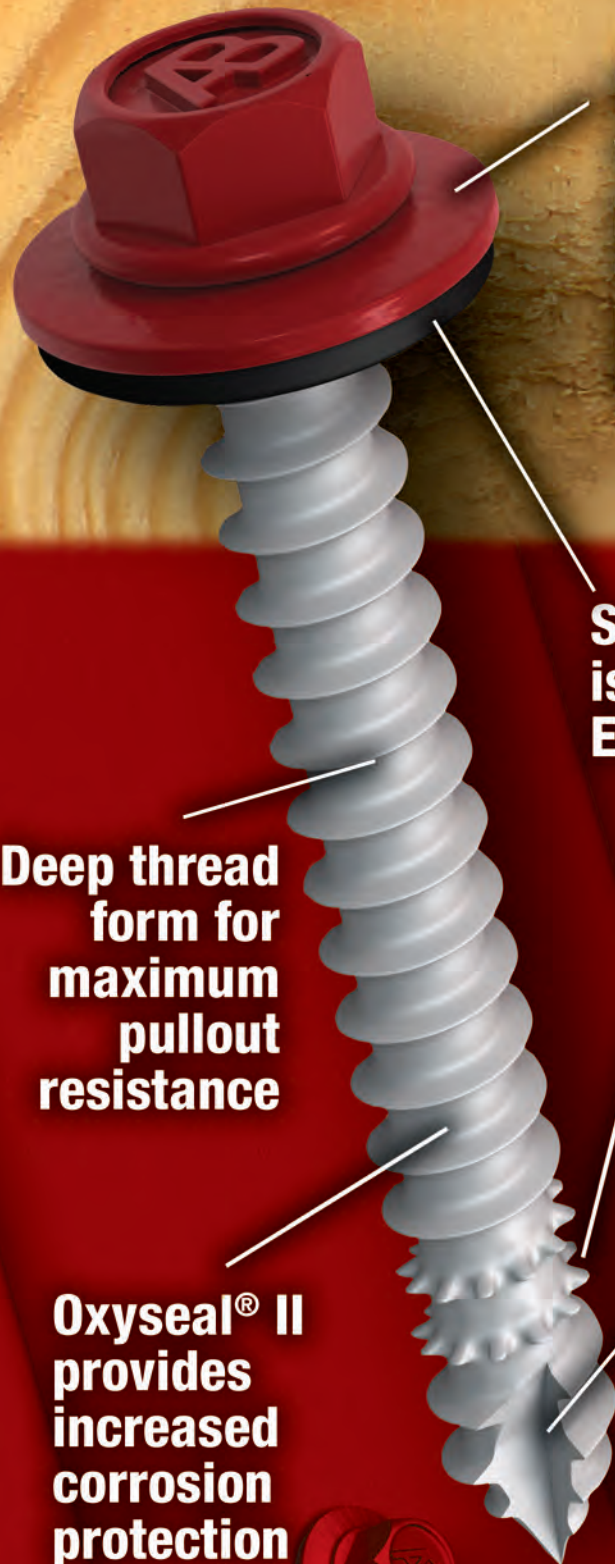

Head & Sealing washer can be painted with oven cured poly-urethane enamel

Sealing washer is non-conductive EPDM rubber

Deep thread form for maximum pullout resistance

Innovative hybrid threads cut through hard woods and knots

Oxyseal® II provides increased corrosion protection

Type-17 Point easily penetrates lapped high tension steel



ATLAS™
Fasteners For Construction

Pull-Out Test Results


Screw Description	Test Material	Ultimate Pullout Lbs.
Woodtite #14-10 Mechanical Zinc Plating (.0003) Min. Sharp Point	SPF #2	1,080 (1½" Penetration)
	7/16" OSB	213
	5/8" OSB	301
	1/2" CDX	520
	5/8" CDX	430
	3/4" CDX	718



Fastener Strength Characteristics

(Min. Values)

Size	Steel	Tensile	Shear	Torsional
#14 - 10	C1022	3150 lbs.	2150 lbs.	125 Inch lbs.

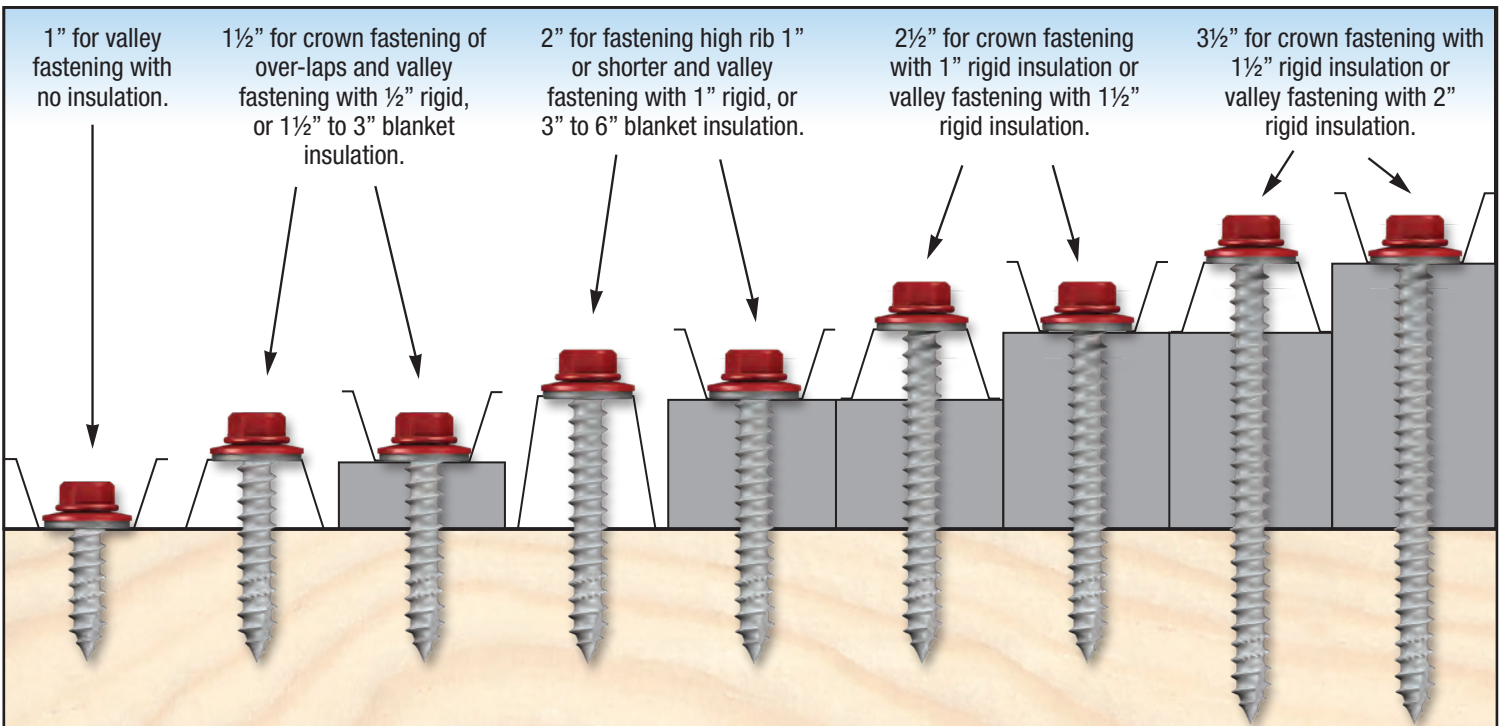

www.atlasfasteners.com

1628 Troy Road • Ashland, Ohio 44805

Phone: 419-289-6171 • Fax: 419-289-2564

800-321-6977

SALES AND SERVICE CENTERS:

Ashland, OH

1-800-321-6977

Flat Rock, NC

1-800-364-0370

Houston, TX

1-800-503-2105

Salem, OR

1-800-547-8740