


ULTIMATE[®] LocFAST

Long-Life Fasteners with DekFast[®] Multi-Seal[™] Washers

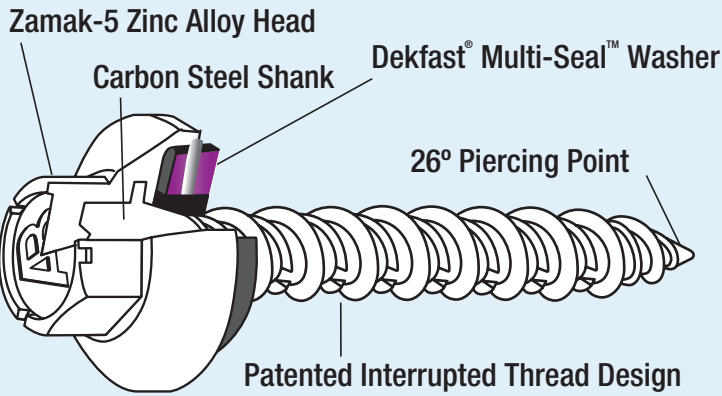

Diameter: #10 **Point:** Sharp 26°
Threads per In.: 14 **Material:** Carbon Steel
Length: 1", 1-1/2" and 2" **Finish:** Mechanical Zinc
Head: 5/16" Cast Zinc

ENGINEERING TEST REPORT


For questions contact Technical Service: 1-800-321-6977

Fastener Diameter	Minimum Torsional	Minimum Tensile	Minimum Shear
#10	68 in. lbs.	1817 lbs.	1216 lbs.


Test Results - in 2 x 4 Pine (1" Penetration)

	Pull Out	Back Out Resistance	Installation Speed (Revolutions per Inch)
#10 -14 Ultimate Wood	796 lbs.	31 in. lbs.	6.25

Note: Pull-out values are a measure of wood material strength.



DISCLAIMER: All test results and recommendations are based on laboratory tests. Specific job site conditions should be taken into consideration when specifying the proper fastener. Because applications may vary, we assume no liability for use of this information.

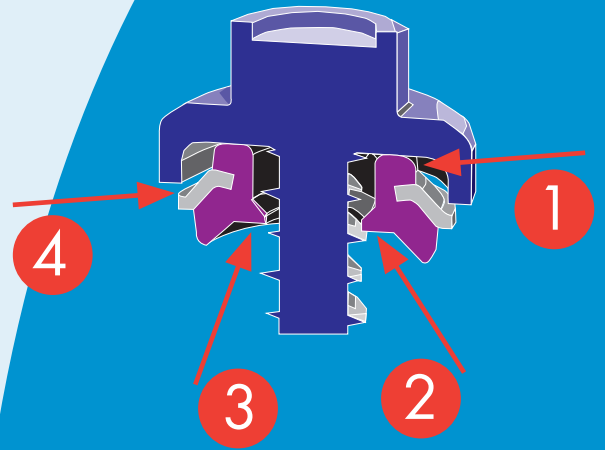

Four Sealing Points

Unique design gives a perfect seal

1. Protects and seals under the head
2. Against the shank
3. Against the roof sheet
4. Around the perimeter

Extra Strength

Metal encapsulated in EPDM for real strength

No Distortion

Engineered to distribute the load

DEKS

A Skellerup Industries Company

Build it better with

ATLAS

Fasteners For Construction

www.atlasfasteners.com

1628 Troy Road • Ashland, Ohio 44805

Phone: 419-289-6171 • Fax: 419-289-2564

800-321-6977