



Over 100 Years of Experience

# #14 WoodTite


- Head and sealing washer can be painted with oven cured poly-urethane enamel
- Sealing washer is non-conductive EPDM rubber
- Deep thread form for maximum pullout resistance
- OxySeal II provides increased corrosion protection
- Type-17 Point easily penetrates lapped high tension steel



Threads per In.: 14  
 Length: 1", 1½", 2", 2½", 3"  
 Point: Type-17  
 Material: Carbon Steel  
 Coating: Oxyseal II

## Strength Characteristics (Min. Values)

Size	Steel	Tensile	Shear	Torsional
#14 - 10	C1022	3150 lbs.	2150 lbs.	125 Inch lbs.

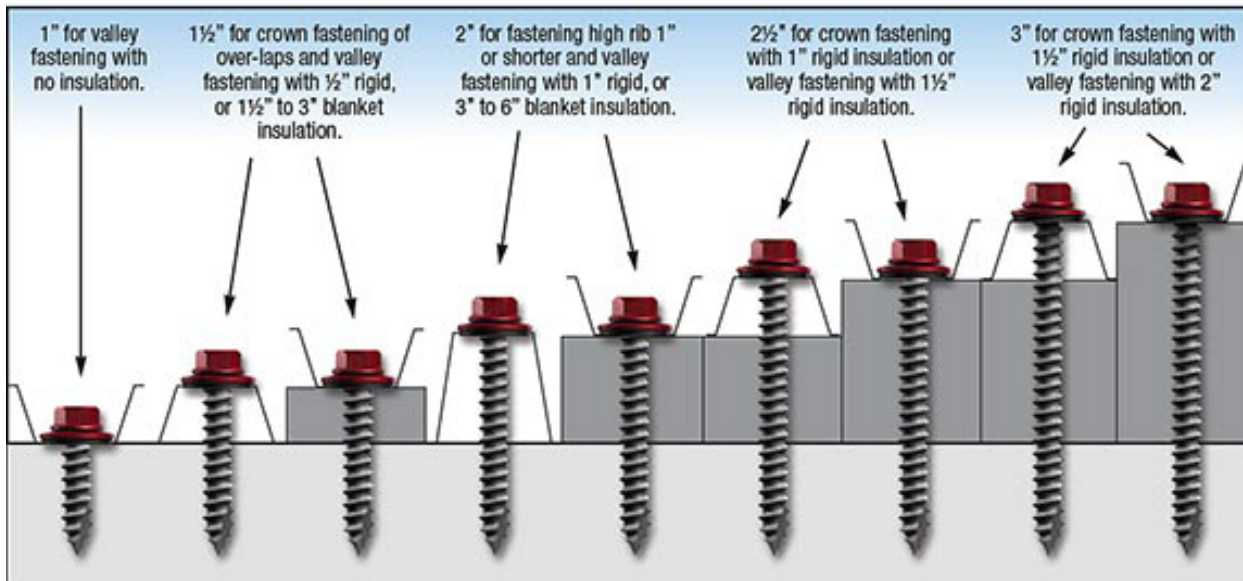

[www.atlasfasteners.com](http://www.atlasfasteners.com)

1628 Troy Road • Ashland Ohio, 44805  
T: 419-289-6171 • F: 419-289-2564

**800-321-6977**

### SALES AND SERVICE CENTERS

Ashland, Ohio  
1-800-321-6977

Flat Rock, NC  
1-800-364-0370

Houston, TX  
1-800-503-2105

Salem, OR  
1-800-547-8740



**Over 100 Years of Experience**

### Pull Out Test Results

Test Material	Ultimate Pullout Lbs.
SPF #2	1,080 (1½" Penetration)
7/16" OSB	213
5/8" OSB	301
1/2" CDX	520
5/8" CDX	430
3/4" CDX	718

Note: Pull-out values are a measurement of wood material strength. Actual field values may vary.



[www.atlasfasteners.com](http://www.atlasfasteners.com)

1628 Troy Road • Ashland Ohio, 44805  
T: 419-289-6171 • F: 419-289-2564

**800-321-6977**

### SALES AND SERVICE CENTERS

Ashland, Ohio  
1-800-321-6977

Flat Rock, NC  
1-800-364-0370

Houston, TX  
1-800-503-2105

Salem, OR  
1-800-547-8740