




Over 100 Years of Experience

# [LowPro]<sup>2</sup> Woodscrew

A New Engineered Low Profile Fastener That Is:

- Low profile design provides added clearance for concealed fastener panel systems
- Cosmetically appealing
- Low head height blends in with panel
- Head entraps sealing washer
- Wobble free Installation
- #3 Driver installs all sizes
- No pre-drilling required
- Coarse threads provide secure fastening into wood and metal

## [Low Pro]<sup>2</sup> Low Profile Square Drive Fasteners

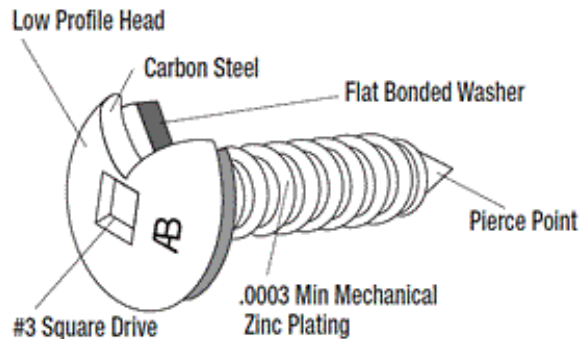

### Strength Characteristics

For Self-Drilling and Self-Tapping Fasteners

Fastener Size	Minimum Tensile (pounds)	Min. Fastener Torsional Strength (inch-pounds)	Minimum Shear Strength (pounds)
12-11	2197 in. lbs.	82 in. lbs.	1064 in. lbs.



[www.atlasfasteners.com](http://www.atlasfasteners.com)

1628 Troy Road • Ashland Ohio, 44805  
T: 419-289-6171 • F: 419-289-2564

**800-321-6977**

### SALES AND SERVICE CENTERS

Ashland, Ohio  
1-800-321-6977

Flat Rock, NC  
1-800-364-0370

Houston, TX  
1-800-503-2105

Salem, OR  
1-800-547-8740




**Over 100 Years of Experience**



**Pull-Over  
Values (in. lbs.)**

For Self-Drilling & Self-Tapping Fasteners

Gauge			
Fastener Diameter	24 (.0276)	26 (.0217)	29 (.0172)
12-11	884 in. lbs.	700 in. lbs.	390 in. lbs.



**Pull-Out  
Values (in. lbs.)**

Self-Drilling & Self-Tapping Fasteners

Substrates	12-11
2 x 4 Pine	800 in. lbs.
5/8 in. Plywood	546 in. lbs.
1/2 in. OSB	243 in. lbs.



[www.atlasfasteners.com](http://www.atlasfasteners.com)

1628 Troy Road • Ashland Ohio, 44805  
T: 419-289-6171 • F: 419-289-2564

**800-321-6977**

**SALES AND SERVICE CENTERS**

Ashland, Ohio  
1-800-321-6977

Flat Rock, NC  
1-800-364-0370

Houston, TX  
1-800-503-2105


Salem, OR  
1-800-547-8740



Over 100 Years of Experience


### Engineering Test Results

All test results and recommendations are based on laboratory tests. Specific job site conditions should be taken into consideration when specifying the proper fastener. Because applications vary, we assume no liability for use of this information.




[Low Pro]² #12 - 11 x 1"

A - Head, Across Flats:	.488" - .508"
B - Major Diameter:	.201" - .208"
C - Minor Diameter:	.125" - .131"
D - Self-Tapper (AB Point)	



[Low Pro]² #12 - 11 x 1 1/2"

A - Head, Across Flats:	.488" - .508"
B - Major Diameter:	.201" - .208"
C - Minor Diameter:	.125" - .131"
D - Self-Tapper (AB Point)	

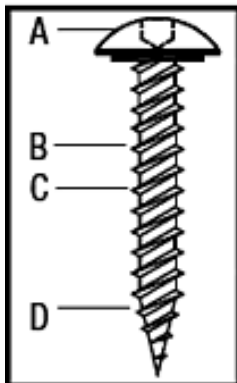

[Low Pro]² #12 - 11 x 2 1/2"

A - Head, Across Flats:	.488" - .508"
B - Major Diameter:	.201" - .208"
C - Minor Diameter:	.125" - .131"
D - Self-Tapper (AB Point)	



[www.atlasfasteners.com](http://www.atlasfasteners.com)

1628 Troy Road • Ashland Ohio, 44805  
T: 419-289-6171 • F: 419-289-2564

**800-321-6977**

### SALES AND SERVICE CENTERS

Ashland, Ohio  
1-800-321-6977

Flat Rock, NC  
1-800-364-0370

Houston, TX  
1-800-503-2105

Salem, OR  
1-800-547-8740