




Over 100 Years of Experience

UltiMate Long-Life Fasteners

- New Low Profile, self-cleaning head design
- Lifetime warranty against red rust on the UltiMate head
- Cast zinc head (not capped) prevents head failure during installation; provides excellent surface paint adhesion
- Special undercut entraps sealing washer, even when driven at extreme angles
- EPDM sealing washer assures waterproof seal, even under harsh conditions
- EPDM sealing washer is non-conductive minimizing "Halo" corrosion effect.
- Indented hex head design insures a snug socket fit on the bearing surface, allowing fastener to be driven perpendicular to the panel for fast, easy installation.
- Carbon steel shank
- .0003 minimum mechanical zinc plated shank.

LowPro
ULTIMATE
Low Profile Head Design

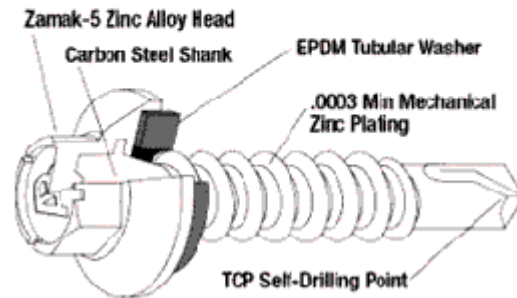

www.atlasfasteners.com

1628 Troy Road • Ashland Ohio, 44805
T: 419-289-6171 • F: 419-289-2564

800-321-6977

SALES AND SERVICE CENTERS

Ashland, Ohio
1-800-321-6977





Flat Rock, NC
1-800-364-0370

Houston, TX
1-800-503-2105

Salem, OR
1-800-547-8740



Over 100 Years of Experience

	Size	Point	Carton Qty.
Stitch/Lap Point 5/16 Hex Undercut Head			
	1/4" LAP	MINI	2,500
	1/4-14 x 1"	TCP1	2,000
	#18-9 x 1"	TCP1	2,000
3/8 Hex Undercut Head			
	1/4" LAP	MINI	2,500
Long Pilot Point 5/16 Hex Undercut Head			
	#12-14 x 1"	TCP3	2,500
	#12-14 x 1-1/4"	TCP3	2,000
	#12-14 x 1-1/2"	TCP3	1,500
	#12 (1/4-14) x 1-7/8"(Insul-Dril®)	TCP3	1,500
	#12-14 x 2"	TCP3	1,500
	1/4-14 x 1-1/4"	TCP3	1,500
	1/4-14 x 1-1/2"	TCP3	1,500
3/8 Hex Undercut Head			
	#12-14 x 1"	TCP3	2,000
	#12-14 x 1-1/4"	TCP3	2,000
	#12-14 x 1-1/2"	TCP3	1,500
	#12-14 x 2"	TCP3	1,500
	1/4-14 x 1-1/4"	TCP3	2,000
#5 Point 5/16 Hex Undercut Head			
	#12-24 x 1-1/4"	TCP5	2,000



www.atlasfasteners.com

1628 Troy Road • Ashland Ohio, 44805
T: 419-289-6171 • F: 419-289-2564

800-321-6977

SALES AND SERVICE CENTERS

Ashland, Ohio
1-800-321-6977

Flat Rock, NC
1-800-364-0370

Houston, TX
1-800-503-2105

Salem, OR
1-800-547-8740



Over 100 Years of Experience

AB Point

5/16 Hex Undercut Head

	1/4-14 x 3/4"	AB	2,500
	1/4-14 x 1"	AB	2,000
	1/4-14 x 1-1/2"	AB	1,500
	17-14 x 1"	AB	1,500

3/8 Hex Undercut Head

	1/4-14 x 3/4"	AB	2,500
	1/4-14 x 1"	AB	2,000
	1/4-14 x 1-1/2"	AB	1,500
	#17 x 1"	AB	1,500

3/8 Hex Flat with Bonded Washer

	11/32-12 x 1-1/4"	AB	1,000
--	-------------------	----	-------



PULL-OVER VALUES (lbs.)

Gauge

Fastener Dia.	22 (.0299)	24 (.0239)	26 (.0179)
1/4"-14	1,320	950	660
#12-14	1,120	975	825



www.atlasfasteners.com

1628 Troy Road • Ashland Ohio, 44805
T: 419-289-6171 • F: 419-289-2564

800-321-6977

SALES AND SERVICE CENTERS

Ashland, Ohio
1-800-321-6977

Flat Rock, NC
1-800-364-0370

Houston, TX
1-800-503-2105

Salem, OR
1-800-547-8740



Over 100 Years of Experience



PULL-OUT VALUES (lbs.)

Gauge

Steel Thickness	12-14, TCP2	1/4"-14, TCP1
26	159	211
24	246	332
22	286	431
20	378	565
18	608	803
16	851	1,154
14	1,184	-
12	1,858	-
1/8"	2,571	-
3/16"	3,523	-

Recommended Driving Speeds:

Drilling Fasteners:

- #6 - #10 use an electric screw gun with depth sensing nose piece at 2,500 RPM max.
- #12 - #18 use an electric screw gun with depth sensing nose piece at 2,000 RPM max.

Self-Tapping Fasteners:

- Carbon & 410 Stainless use an electric screw gun with depth sensing nose piece at 2,000 RPM max.
- 300 Stainless use an electric screw gun with depth sensing nose piece at 800 RPM max.



www.atlasfasteners.com

1628 Troy Road • Ashland Ohio, 44805
T: 419-289-6171 • F: 419-289-2564

800-321-6977

SALES AND SERVICE CENTERS

Ashland, Ohio
1-800-321-6977

Flat Rock, NC
1-800-364-0370

Houston, TX
1-800-503-2105

Salem, OR
1-800-547-8740